

Purolite® Buffered Resins

Minimizing Start-Up Headaches and Preserving Critical Influent Chemistry Levels


Anion exchange resins are recognized as best available technology for removal of harmful contaminants such as hexavalent chromium, perchlorate and PFAS. One major drawback of anion exchange resin systems at startup is that they simultaneously remove alkalinity, sulfate and other anions in exchange for chloride. Buffered resin can reduce the effects of water chemistry changes at startup by:

- Prevent effluent chloride from approaching or exceeding local discharge standards
- Prevent high chloride to sulfate mass ratio (CMSR) which can create lead leaching potential in piping systems
- Stabilize effluent pH and meet local discharge standard

Currently, standard chloride form resins are rinsed with influent water until the water chemistry equilibrates with the resin and the effluent levels match the influent levels. This may take a couple of days, depending on water chemistry and flow design. Understanding the burden of this initial rinse on operations, Purolite is now offering buffered resins for these critical ion exchange resin applications.

FIGURE 1

Typical Elution Profile of PFA694EBF at Startup Compared to Non-Buffered Version

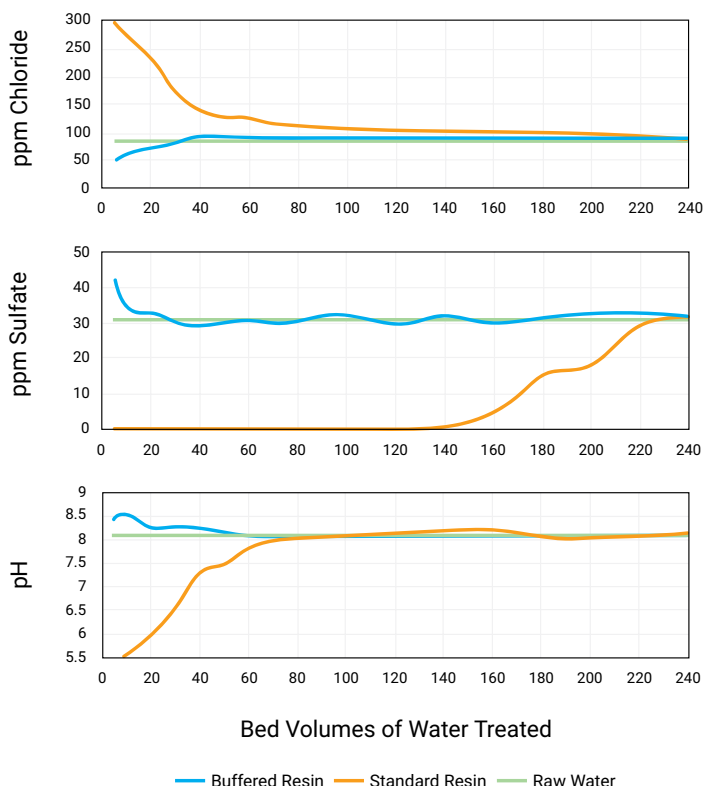

Starting with buffered form resins get your system up and running in a fraction of the time as shown in Figure 1.

This simplifies operations, saves time, and minimizes rinse water waste.

Purolite PGW6002EBF

The buffered form of PGW6002E, a high capacity strong base anion ideal for single-use operation removal of hexavalent chromium or uranium.

Purolite A532EBF

The buffered form of A532E, which shows high perchlorate selectivity.

Purofine® PFA694EBF

The buffered form of PFA694E, a resin tailored to reach non-detect levels of PFAS compounds.



A532EBF and PFA694EBF are NSF/ANSI/CAN 61 certified drinking water system components.

Learn more at:
www.purolite.com



Algeria
Australia
Bahrain
Brazil
Canada
China
Czech Republic
France
Germany

India
Indonesia
Israel
Italy
Japan
Jordan
Kazakhstan
Korea
Malaysia

Mexico
Morocco
New Zealand
Poland
Romania
Russia
Singapore
Slovak Republic
South Africa

Spain
Taiwan
Tunisia
Turkey
UK
Ukraine
USA
Uzbekistan



Americas

Purolite
2201 Renaissance Blvd.
King of Prussia, PA 19406
T +1 800 343 1500
T +1 610 668 9090
F +1 800 260 1065
americas@purolite.com

EMEA

Purolite Ltd.
Unit D
Llantrisant Business Park
Llantrisant, Wales, UK
CF72 8LF
T +44 1443 229334
F +44 1443 227073
emea@purolite.com

FSU

Purolite Ltd.
Office 6-1
36 Lyusinovskaya Str.
Moscow, Russia
115093
T +7 495 363 5056
F +7 495 564 8121
fsu@purolite.com

Asia Pacific

Purolite China Co. Ltd.
Room 707, C Section
Huanglong Century Plaza
No.3 Hangda Road
Hangzhou, Zhejiang, China 310007
T +86 571 876 31382
F +86 571 876 31385
asiapacific@purolite.com

Purolite, the leading manufacturer of quality ion exchange, catalyst, adsorbent and specialty high-performance resins, is the only company that focuses 100% of its resources on the development and production of resin technology.

We're ready to solve your process challenges. For further information on Purolite products and services, visit www.purolite.com or contact your nearest Technical Sales Office.



www.purolite.com

©2022 Purolite
All rights reserved.
P-000238-NPOLD-0222-R3-ENG-PCO

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Purolite expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.