

# Purolite™ SGA5500H Resin

This Engineering Bulletin provides typical chemical and physical characteristics, recommended operating conditions, hydraulic characteristics, pressure drop and other operational data for Purolite SGA5500H strong base anion uniform particle size resin used for condensate polishing applications.

# Purolite SGA5500H

## Contents

Introduction	3
<hr/>	
Hydraulic Characteristics	4
<hr/>	
Performance Characteristics	6

## Introduction

[Purolite SGA5500H](#) is a specialized uniform particle size gel polystyrene quaternary amine strong base anion exchange resin with exceptional physical strength and osmotic shock resistance. The resin performs especially well in high-flow, mixed bed water demineralization applications such as make-up water or condensate polishing. Additionally, uniform grading and excellent chemical and physical stability ensure fast exchange kinetics and low pressure drop at the high flow velocities experienced within external regenerated CPP systems. The resin is also ideal in related systems where consistent particle size and kinetics are important factors for near-perfect bed separation prior to regeneration, as well as the production of high-purity treated water. The resin can be used as an anion component in primary demineralizer systems or within mixed bed systems along with [Purolite SGC650H](#) strong acid cation resin.

**TABLE 1** Purolite SGA5500H Typical Chemical and Physical Characteristics

Characteristics	Description/Value
<a href="#">Polymer Structure</a>	Gel polystyrene crosslinked with divinylbenzene
<a href="#">Appearance</a>	Spherical Beads
<a href="#">Functional Group</a>	Type I quaternary ammonium
<a href="#">Ionic Form</a>	OH <sup>-</sup> form
<a href="#">Total Capacity (min.)</a>	1.1 eq/L (24.0 Kgr/ft <sup>3</sup> ) (OH <sup>-</sup> form)
<a href="#">Moisture Content</a>	55–65% (OH <sup>-</sup> form)
<a href="#">Moisture Retention</a>	43–48% (Cl <sup>-</sup> form)
<a href="#">Mean Diameter</a>	590 ± 50 µm
<a href="#">Uniformity Coefficient</a>	1.1–1.2
<a href="#">Reversible Swelling, Cl<sup>-</sup> → OH<sup>-</sup> (max.)</a>	24%
<a href="#">Specific Gravity</a>	1.08
<a href="#">Shipping Weight (approx.)</a>	660–700 g/L (41.2–43.8 lb/ft <sup>3</sup> )
<a href="#">Temperature Limit</a>	100 °C (212.0 °F) (Cl <sup>-</sup> form)
<a href="#">Temperature Limit</a>	60 °C (140.0 °F) (OH <sup>-</sup> form)

**TABLE 2** Purolite SGA5500H Recommended Operating Conditions

Characteristics	Description/Value
Operating Temperature (OH <sup>-</sup> form)	60 °C (140 °F) (max.)
Operating Temperature (Cl <sup>-</sup> form)	100 °C (212 °F) (max.)
Bed Depth	450 mm (1.5 ft) (min.)
Flow Rate (Service/Fast Rinse)	5–60 m/h (2–24 gpm/ft <sup>2</sup> )
Flow Rate (Service Condensate Polishing)	40–150 m/h (16–60 gpm/ft <sup>2</sup> )
Flow Rate (Regeneration Displacement Rinse)	1–10 m/h (0.4–4 gpm/ft <sup>2</sup> )
Total Rinse Requirement	2–5 Bed Volumes
Regeneration Type	4–8% NaOH
Regeneration Temperature	50 °C (120 °F) (max.)
Backwash	See backwash data (Page 2)

## Hydraulic Characteristics

The pressure drop across a properly classified bed of ion-exchange resin depends on the particle size distribution, bed depth and void volume of the exchanger as the linear flow rate and the viscosity (hence the temperature) of the influent solution. Anything affecting these parameters, such as the presence of particulate matter in the condensate filtered out by the bed and abnormal compaction of the resin bed, will have an adverse effect and result in an increase pressure drop. The excellent physical stability and osmotic shock resistance of the product helps prevent pressure drop increase during operation. Typical values of pressure drop across a bed of Purolite SGA5500H are given for a range of flow rates and temperatures in Figure 1.

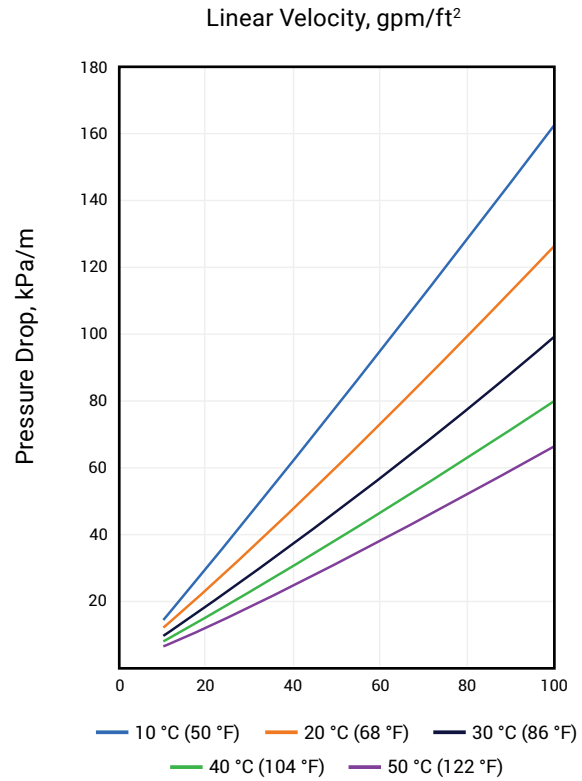
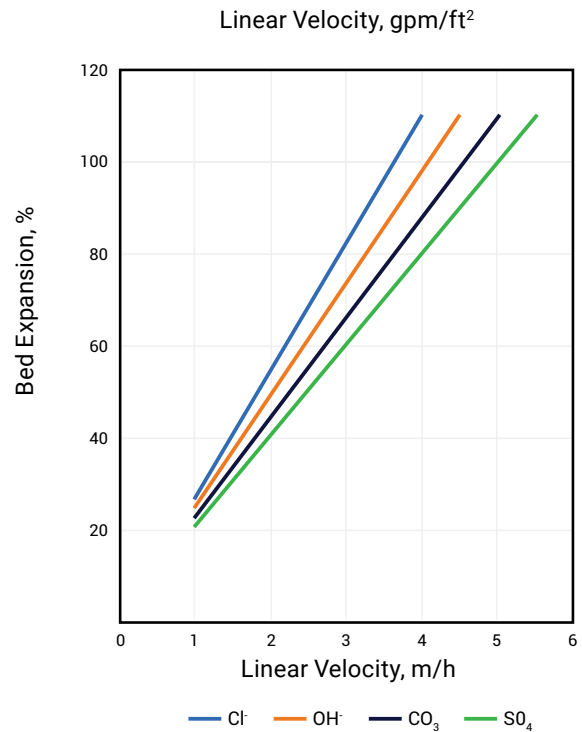
**FIGURE 1****Pressure Drop  
Purolite SGA5500H****FIGURE 2****Backwash Expansion  
Purolite SGA5500H**

Figure 2 shows the backwash expansion for various ionic forms as a function of linear flow at a temperature of 25°C. For other temperatures use the following:

$$L = L_{25\text{ °C}} [1 + 0.008 (1.8T_c - 45)] \text{ where } L = \text{flow in m/h and } T = \text{Temperature in °C}$$

$$L = L_{77\text{ °F}} [1 + 0.008 (T_c - 77)] \text{ where } L = \text{flow in gpm/ft}^2 \text{ and } T = \text{Temperature in °F}$$

## Performance Characteristics

Purolite SGA550OH is a uniform particle size resin with a small mean bead diameter. This means that there is very little variation in particle size compared to standard grade resins. The main advantages of this characteristic are:


- Increased regeneration efficiency
- Improved operating capacity
- Improved treated water leakage
- Reduced chemical consumption
- Better exchange kinetics especially at higher flow rates
- Less rinse water demand
- Better mixed bed separation

Additionally, uniform particle size resin will generally produce more water of better quality at lower operating costs.

Figure 3 shows typical operating capacity data for Purolite SGA550OH in a condensate polishing mixed bed application.

**FIGURE 3**


### Purolite SGA550OH Operating Capacity in a Polishing Mixed Bed

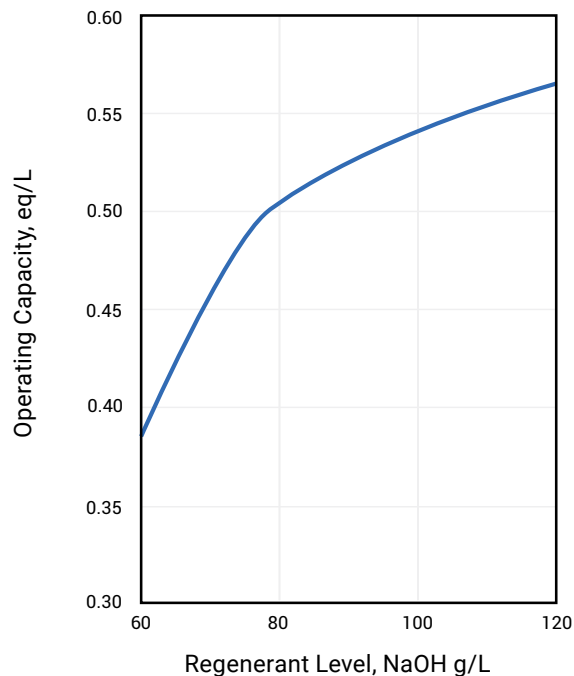

Typical leakage data in a condensate polishing mixed bed application is given in Figure 4. Silica leakage is not only dependent on the regeneration level, but also on other factors like regeneration temperature, condensate temperature and influent silica concentration. As such, the leakage illustration is presented for guidance only.

**FIGURE 4**


**Purolite SGA5500H  
Silica Leakage in a  
Polishing Mixed Bed**

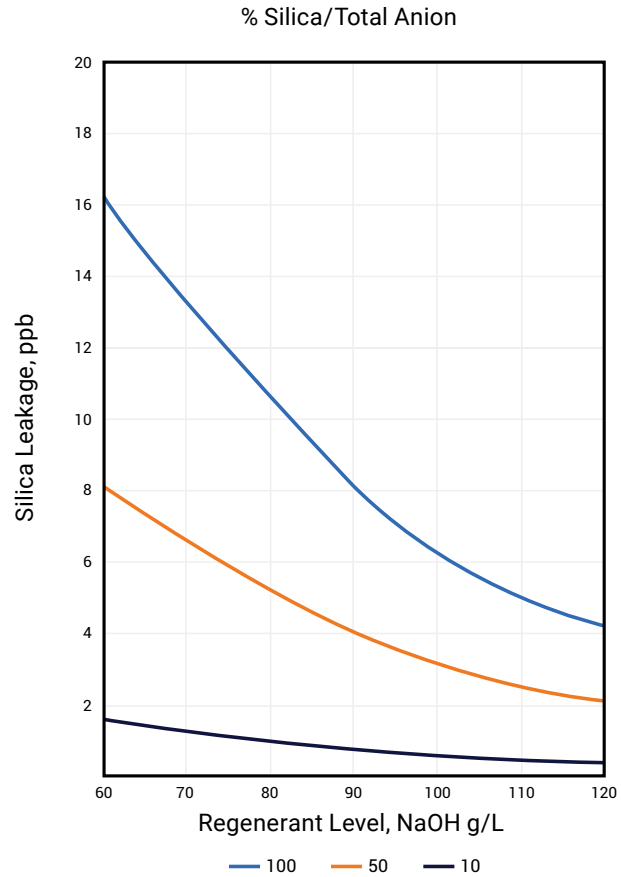

The excellent rinse properties of Purolite SGA5500H results in lower rinse water demand compared to standard grade resins. Figure 5 shows a typical rinse profile for Purolite SGA5500H.

**FIGURE 5**


**Rinse Properties of Purolite SGA550OH**

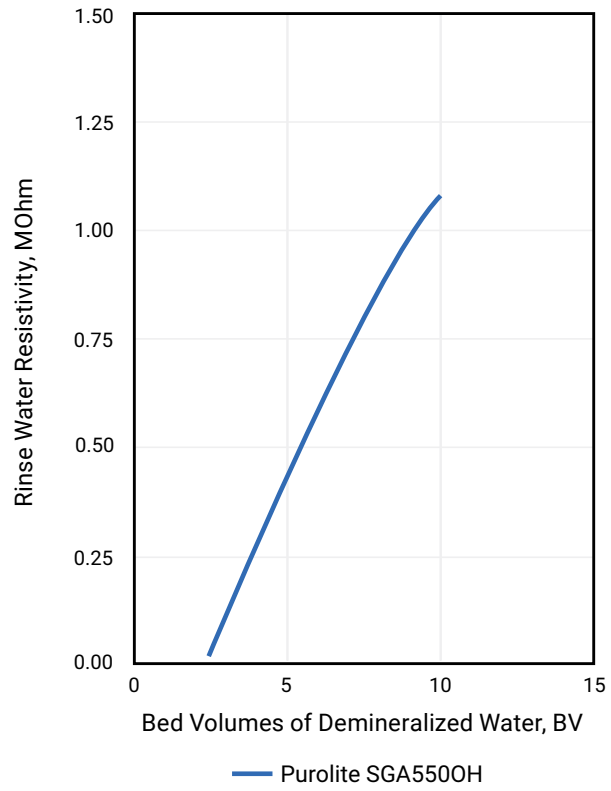

Ecolab is a global developer, manufacturer, and supplier of Purolite™ Resins including ion exchange, catalyst adsorbent and advanced polymers that make the world cleaner and healthier.



[PuorliteResins.com](https://PuorliteResins.com)

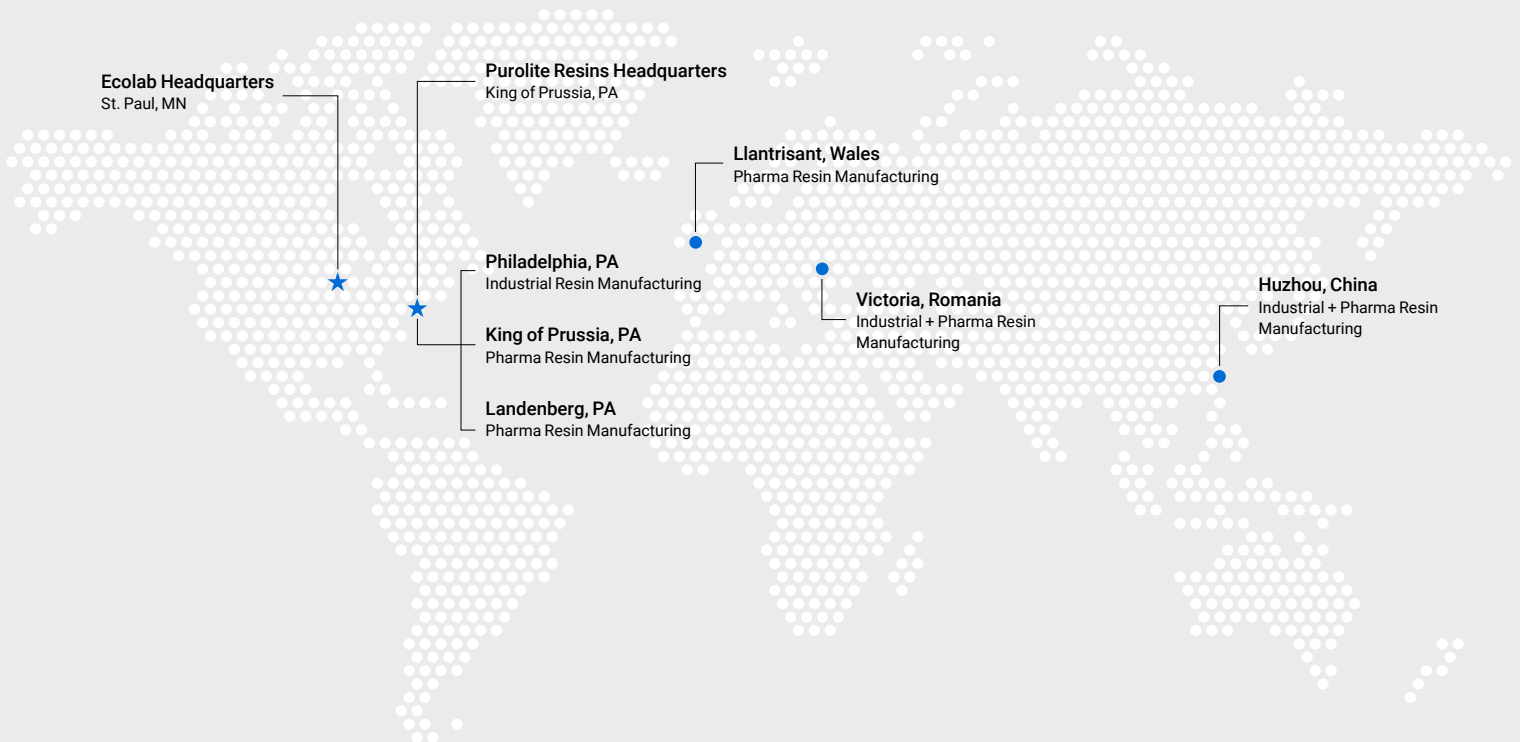

## We're ready to solve your process challenges.

For further information on products and services, visit [PuorliteResins.com](https://PuorliteResins.com) or complete a Contact Us form via [PuorliteResins.com/contact-us](https://PuorliteResins.com/contact-us) or use the QR code.

Contact Us Form:



The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Puorlite expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information, NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.



©2026 Puorlite  
All rights reserved.  
P-000305-NPOLD-0426-R2-ENG-PCO